
Running Engine Stand



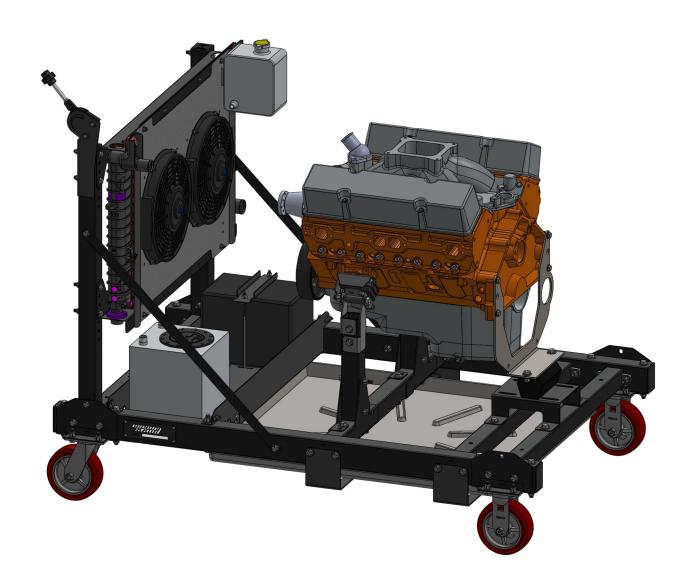

SBC/BBC Engine Assembly Instruction Manual

Important Notes for Assembly:

- This manual is for the SBC/BBC motor mount kit for the Running Engine Stand assembly. If you have not yet started with the Main Assembly or ATW instructions, start there before returning here.
- Use care when handling parts. There may be sharp edges and holes on components. Using thick protective gloves is recommended during the assembly process.
- Each bolt and nut should have the appropriately sized washer placed between the fastener and the frame.

Required Tools:

- Ratchet
- 5/8" Wrench
- 5/8" Socket
- 9/16" Wrench
- 9/16" Socket

If you are experiencing problems upon installation— DO NOT RETURN THIS PRODUCT!


Most installation problems can be easily solved.

First contact technical support at:

Service@mechman.com

1 (888) MECHMAN or 865-522-6166

Included Components:

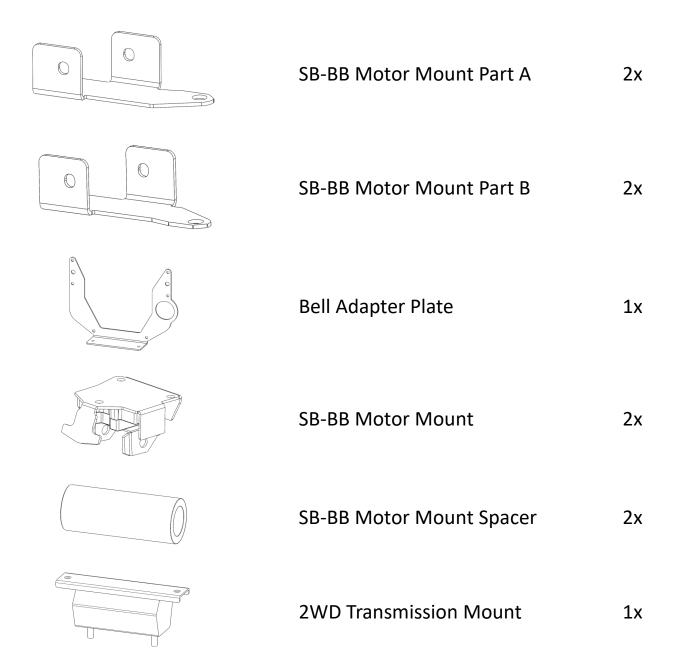

Included Hardware


7/16"-14 x 3.5" Hex Bolt	2x
7/16"-14 x 1" Hex Bolt	2x
3/8"-16 x 3" Hex Bolt	4x
3/8"-16 x 0.75" Hex Bolt	10x
7/16" Flat Washer	8x
3/8" Flat Washer	18x
7/16"-14 Nylock Nut	4x
3/8"-16 Nylock Nut	4x

Step 1: Attaching the Motor Mount Brackets to the Front Engine **Mount Tubes**

Required Components:

Required Hardware:


- 2x SB-BB Motor Mount Part A
- 4x 3/8"-16 x 3" Hex Bolts 4x 3/8"-16 Nylock Nut
- 2x SB-BB Motor Mount Part B
- 8x 3/8" Flat Washer
- Use the 3/8"-16 x 3" Hex Bolts to attach the SB-BB Motor Mount Brackets to the Front Engine Mount Tubes.

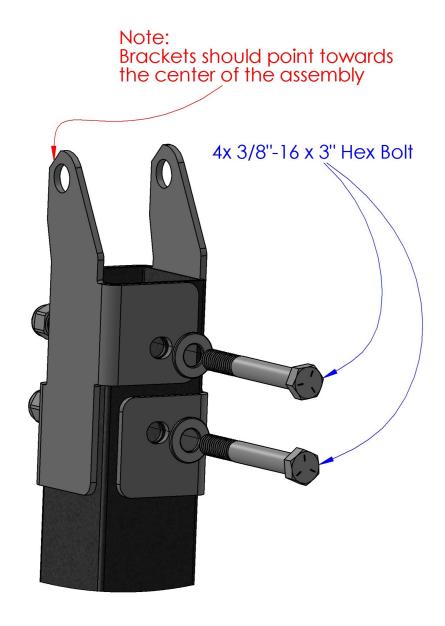

Step 2: Attaching the SBC/BBC Motor Mounts to the Motor Mount **Brackets**


- 2x SB-BB Motor Mount
- 2x 7/16"-14 x 3.5" Hex Bolts
- 2x 7/16"-14 Nylock Nut

- 2x SB-BB Motor Mount Spacer •
- 4x 7/16" Flat Washer
- Place the SB-BB Motor Mount Spacer between the two SB-BB Motor Mount Brackets.
- Use the 7/16"-14 x 3.5" Hex Bolts to attach the SB-BB Motor Mount to the SB-BB Motor Mount Brackets.

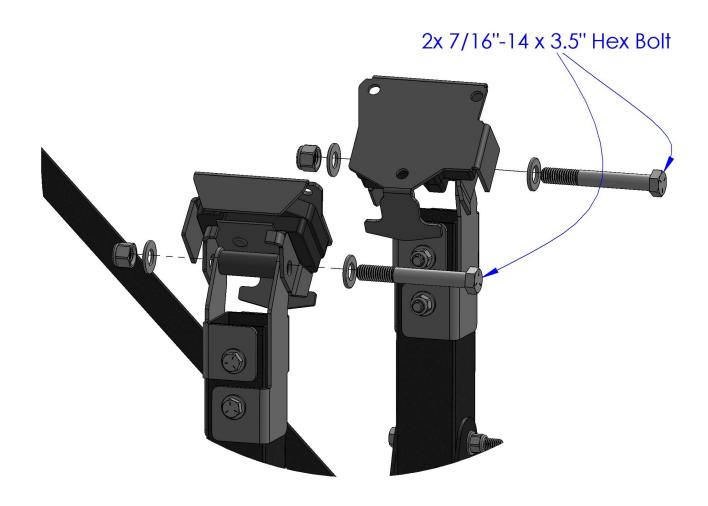


Step 3: Attaching the 2WD Transmission Mount to the Rear Engine Mount Bracket

- 1x 2WD Transmission Mount 2x 3/8"-16 Flanged Nut (Included w/ Transmission Mount)
- Use the 3/8"-16 Flanged Nuts to attach the 2WD Transmission Mount to the Rear Engine Mount Bracket.
- Note: Place the 2WD Transmission Mount in the middle set of slots.

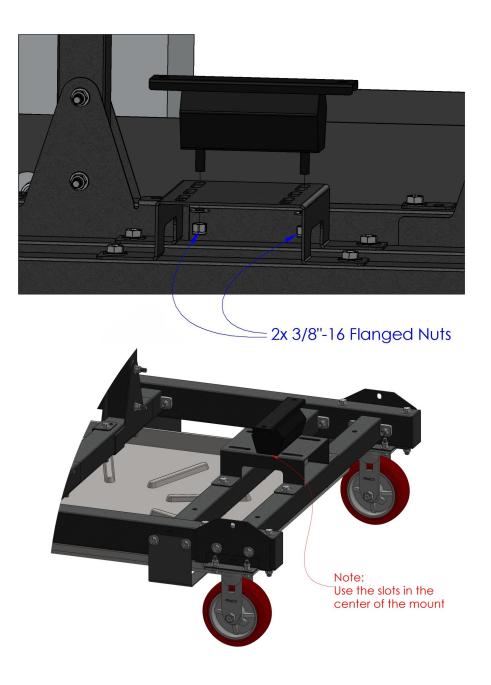

Step 4: Attaching the Bell Adapter Plate to the 2WD Transmission Mount

- 1x Bell Adapter Plate
- 2x 7/16"-14 x 1" Hex Bolts
- 2x 7/16"-14 Nylock Nut
- 4x 7/16" Flat Washer
- Use the 7/16"-14 x 1" Hex Bolts fasteners to attach the Bell Adapter Plate to the 2WD Transmission Mount.

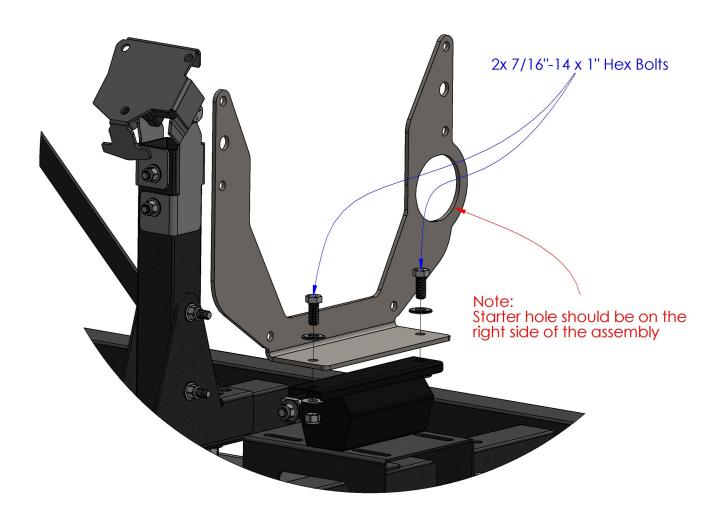

Step 5: Attaching the SBC/BBC Engine to the Assembly

- 1x SBC/BBC Engine (Not Included)
- 10x 3/8"-16 x 0.75" Hex Bolts
- 10x 3/8" Flat Washer
- Use the 3/8"-16 x 0.75" Hex Bolts to attach the SB-BB Motor Mounts to the SBC/BBC
 Engine, then use the 3/8"-16 x 0.75" Hex Bolts to attach the Bell Adapter Plate to the SBC/BBC Engine.

